



NOGGERATH
BELIDOR

Betontechnik GmbH
Concrete Technology



Bullfloat BAP 200 / L-150

L-150 E and L 150 B

This Bullfloat do away with time-consuming and strenuous work with wooden floats.

Special shaped beam together with low-weight material for effective leveling without ridges.

The height adjustable handle is connected directly to the beam.




L-150

BAP 200 E and BAP 200 B

This Bullfloat is made for effective leveling the concrete surface without major effort and without guide rails. The beam is made of aluminum and the profile has a width of 23cm and length of 2,00m with a convex profiled sole. The pitch of the beam can be adjusted by turning the handle.



BAP 200

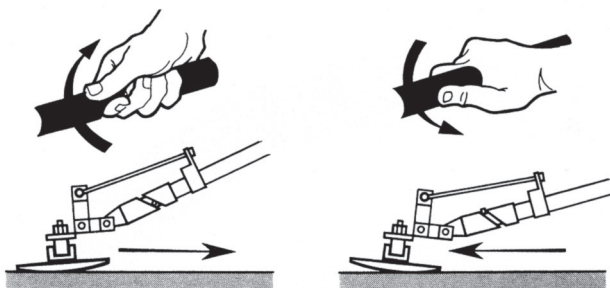

Technical Specifications

Type	Operating width	Drive Unit	Frequency	Weight
	m	V/ Hz	rpm	kg
L-150 E	1,50	Electric engine 220V single phase	10.000	9
L-150 B	1,50	4-stroke Honda engine	up to 10.000	11
BAP 200 E	2,00	Electric engine 220V single phase	10.000	15
BAP 200 B	2,00	4-stroke Honda engine	up to 10.000	17