





NOGGERATH
BELIDOR

Betontechnik GmbH
Concrete Technology



Fresno Trowel NGP 120 B / NGP 150 B

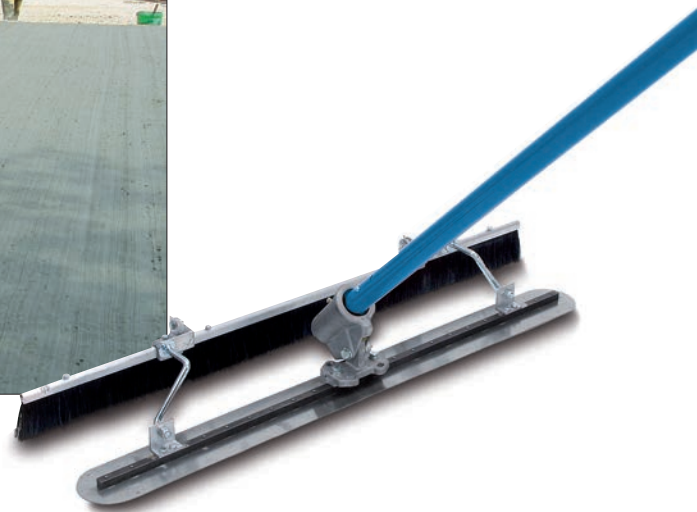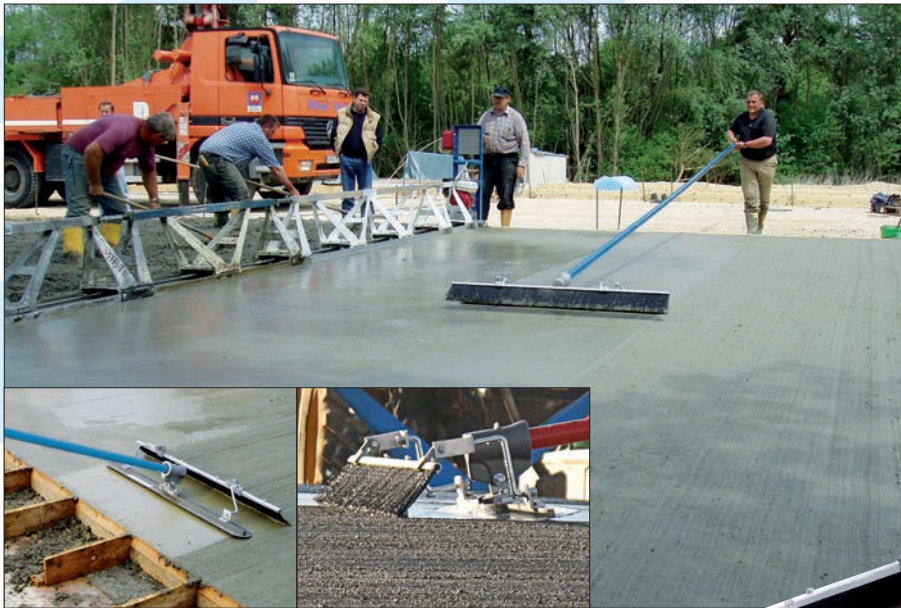

Fresno Trowel with broom for use in road construction and bridge construction

- Follow-up treatment directly after levelling the concrete surface with a vibration screed.
- Correction of unevenness, strips or ridges.
- Accurate flatness in connection with a vibration screed.
- Better surface optic with an operating width of 1,20m/1,50m as traditional Fresno.
- Broom finish "fresh in fresh" for slurry free concrete surfaces.
- Even optic due to 1,20m/1,50m wide broom.
- The Fresno Trowel can be modified that no platforms are needed if your vibration screed has an operating width up to 12 meters.

Technical Specifications

Weight without handle	5,7 kg	5,8 kg
Weight handle each	1,0 kg	1,0 kg
Length handle each	180 cm	180 cm
Quantity of handle	3 = 540 cm	3 = 540 cm
Dimension of blade	120 x 12 cm	150 x 12 cm
Length of broom	12 cm	12 cm
Pitch control of blade	Rotate the handle bar	