





Leveling and compacting with DuoScreed

The flexible applicability of the special beam together with the Vibration unit is made to level and compact the concrete surface perfectly. The beam is a torsion-free construction to guarantee a high level of accuracy concrete leveling.

Main features of DuoScreed:

- Easy to transport: separate parts of beam and engine.
- Beams are easily changeable to one length to another by a high speed mounting system at the vibrations unit.
- Prevent strips and ridges on the concrete surface by special shaped end caps of the beam.
- A height adjustable Hand bar allows fatigue-free and ergonomic work
- Foldable handle for easy storage and transport.
- Multifunctional use: turning the beam by 180 degree usable as vibrating screed (with guide rails) or as Bullfloat (without guide rails).
- Centrifugal force can be easily adjusted in 4 steps. Adaption is possible to length of the beam and concrete consistency.

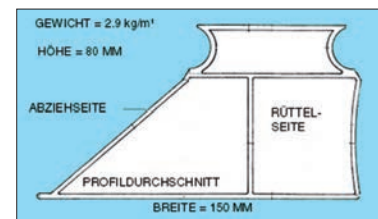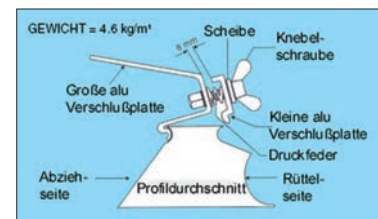

Technical Specifications

Vibration Unit	4-stroke Honda engine GX 35	13 kg
Beams in m	1,52/ 1,83/ 2,44/ 3,05/ 3,66/ 4,27/ 4,88	2,9 kg/ m