





## Leveling and compacting with DuoScreed

The flexible applicability of the special beam together with the Vibration unit is made to level and compact the concrete surface perfectly. The beam is a torsion-free construction to guarantee a high level of accuracy concrete leveling.

### Main features of DuoScreed:

- Easy to transport: separate parts of beam and engine.
- Beams are easily changeable to one length to another by a high speed mounting system at the vibrations unit.
- Prevent strips and ridges on the concrete surface by special shaped end caps of the beam.
- A height adjustable Hand bar allows fatigue-free and ergonomic work
- Foldable handle for easy storage and transport.
- Multifunctional use: turning the beam by 180 degree usable as vibrating screed (with guide rails) or as Bullfloat (without guide rails).
- Centrifugal force can be easily adjusted in 4 steps. Adaption is possible to length of the beam and concrete consistency.

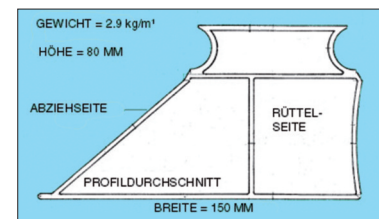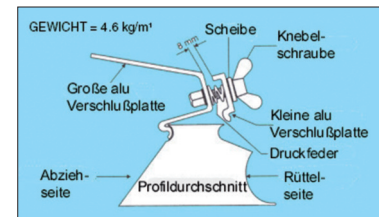

### Technical Specifications

Vibrationseinheit	4-stroke Honda engine GX 35	13,00 kg
-------------------	-----------------------------	----------

Cavus Light Profile

Beams length in m	Weight of beam in kg	Total weight in kg
1,50	4,20	17,20
2,00	5,60	18,60
2,50	7,00	20,00
3,00	8,40	21,40
3,50	9,80	22,80
4,00	11,20	24,20
4,50	12,60	25,60
5,00	14,00	27,00