




Lightweight Bullfloat GP 120

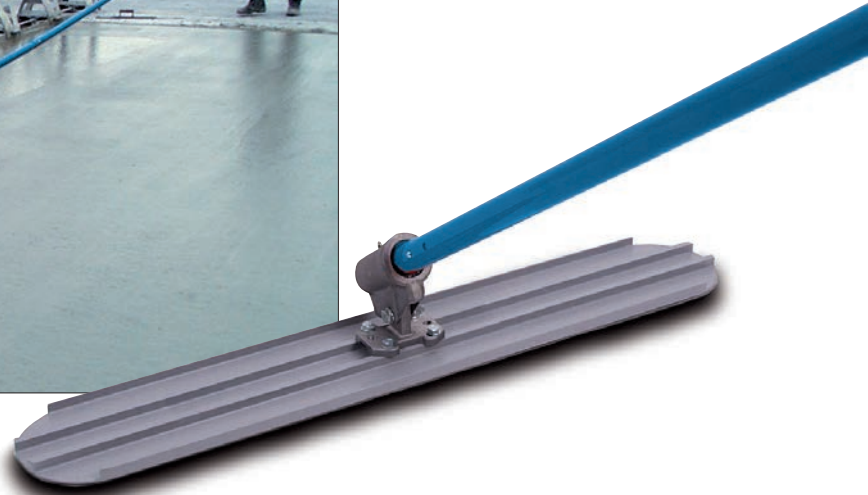

Lightweight Bullfloat for use in industrial construction

- An addition for vibration screeds. Perfect to repair unevenness and strips or ridges.
- Levelling flow concrete if it was installed by Laser-method.
- No concrete slurry on top of the concrete surface.
- Leveling and smoothing from a standing position (with a working range up to 6 m).
- Smoothing of concrete in slopes on ramps or other difficult slope constructions.

Technical Specifications

Weight without handle	5,6 kg
Weight handle each	1,0 kg
Length handle each	180 cm
Quantity of handle	3 = 540 cm
Dimension of blade	120 x 20 cm
Pitch control of blade	Rotate the handle bar